


Solix

— THE TOUGHEST —
PERFORMER
« FOR YOUR FIELD »

60

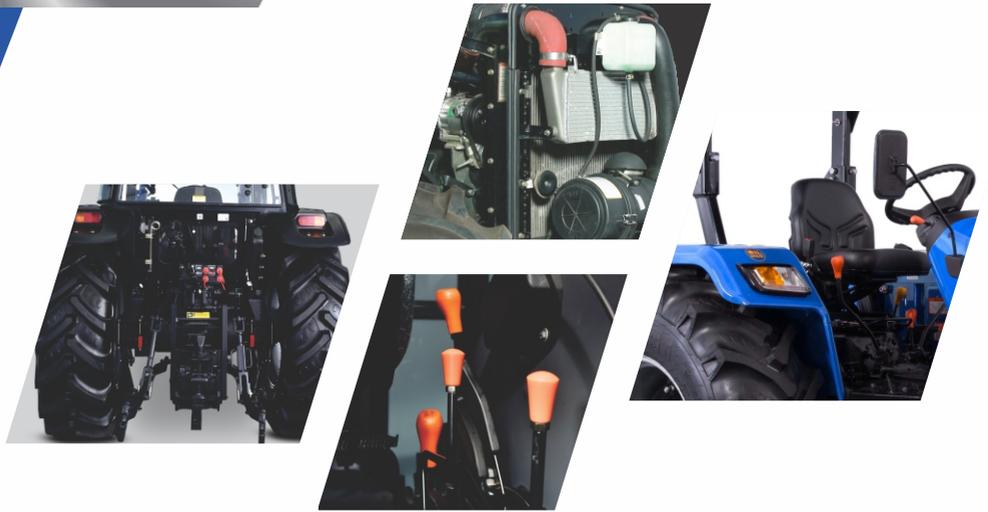

AGILE 4 CYLINDER
ENGINE

8F+2R CONSTANT
MESH

HEAVY LIFT
CAPACITY

PARALLELOGRAM
LOADER OPTION

INTEGRATED SAFETY
HVAC CABIN (OPTIONAL)



**COST
EFFICIENT**
MECHANICAL TRACTORS

MADE OF
**REAL
STEEL**

**STRATEGIC
COLLABORATION
WITH
YANMAR**

**THE TOUGHEST
PERFORMER
«FOR YOUR FIELD»**

60

Solis



FEATURES	S 60
Model Description	Solis 60
ENGINE	
Engine Type	4100 FL
HP Category	60
No. of Cylinders	4
Aspiration	Natural
Cubic Capacity (cc)	4087
Rated RPM	2200
Air cleaner	Dry Type with Clogging Sensor
Cold Start	Standard
Max Torque (nm)(+/-5%)	231@1300 ERPM
Exhaust	Elliptical Upward
TRANSMISSION	
Drive	4WD
Clutch	Dual Clutch
Gearbox	8F+2R
Transmission	Swift Shift
SPEED (FORWARD)	
Maximum Speed (Km/Hr)	36.46@2200
Minimum Speed (Km/Hr)	1.95@2200
BRAKES	
Brakes	Oil Immersed Brakes
Type of actuation	Mechanical
Parking Brake	Independent
DIFFERENTIAL LOCK	
Differential lock	Standard, foot operated
PTO	
PTO (rpm)	540
PTO (Actuation)	Mechanical
STEERING	
Steering	Power
ELECTRICAL	
Battery	12V, 110/88 Ah
Alternator	12V, 36Amps
Seven pin trailer socket	Standard
HYDRAULICS	
3 point linkage	CAT-II
Stay Bars	Adjustable
Hydraulic lifting capacity	2000Kg
Auxiliary Hydraulic circuit	1DA+1SA
Lift Rods	Standard

FEATURES	S 60
SAFETY SWITCH	
Neutral Safety Switch	Standard
Clutch Safety Switch	Standard
Netural Safety Switch	Standard
CAPACITY (LTRS)(+/-5%)	
Fuel tank (Ltr)	65
TYRE	
Front	9.5X24
Rear	16.9 x 28
DIMENSION & WEIGHT(+/-5%)	
Weight(kg) (Unballast)	2742
Wheel Base (mm)	2307
Total Length (mm)	3997
Total Width (mm)	1942
Height (mm) up to ROPS	2620
Min. Ground Clearance (mm)	293
Front Track (mm)	1672
Rear Track (mm)	1515
OTHERS	
Fuel Indicator gauge	Standard
Front Tow Hook	Inbuilt in front weight
Front & Rear Weights with Std. Ballast	Front- 31kgX6 , Rear- 1X34 kg each tyre
Trailer Hitch	Swinging Drawbar
ROPS	Standard
OPTIONAL FEATURES	
Canopy	Optional
2WD Variant	Yes (optional) with 7.5X6 Front Tyre
Tyre 4WD	16.9X30 (Rear)

*Since product improvement is a continuous process, specification and details provided are subject to change without prior notice. E&OE, Please correlate with latest updates, accessories shown may not be part of standard product.

DEALER STAMP



Solis S 60 (Non EU-19)

INTERNATIONAL TRACTORS LIMITED

International Business Office: Teri School of Advanced Studies, Plot No.10, Institutional Area, Vasant Kunj, New Delhi-110070 (India)

Phone: +91 11 66 45 5200 | Work: Jalandhar Road, Hoshiarpur - 146022, Punjab (India) | Phone: +91 1882 302220, 302221

Fax: +91 1882 302293 | Email: exports@sonalika.com | URL: www.sonalika.com/www.solisworld.com